



RITELITE
(SYSTEMS) LTD

Beta E124 Desktop Charger

FEATURES


- Switch mode
- Input voltage 220/240V 50Hz
- Output voltage 12V
- Output current 4.0A
- 3 stage charging
 - Constant current
 - Constant voltage
 - Float
- Timing control
- LED status indication
- Reverse polarity protection
- Compact plastic housing
- Short circuit protection
- Light weight
- Cost effective

OPTIONS

- Output connector options
- Set for sealed lead acid
- European plug format

APPLICATIONS

- Portable worklights
- Golf
- Ride on toys
- Medical equipment
- Electric bikes
- Standby units

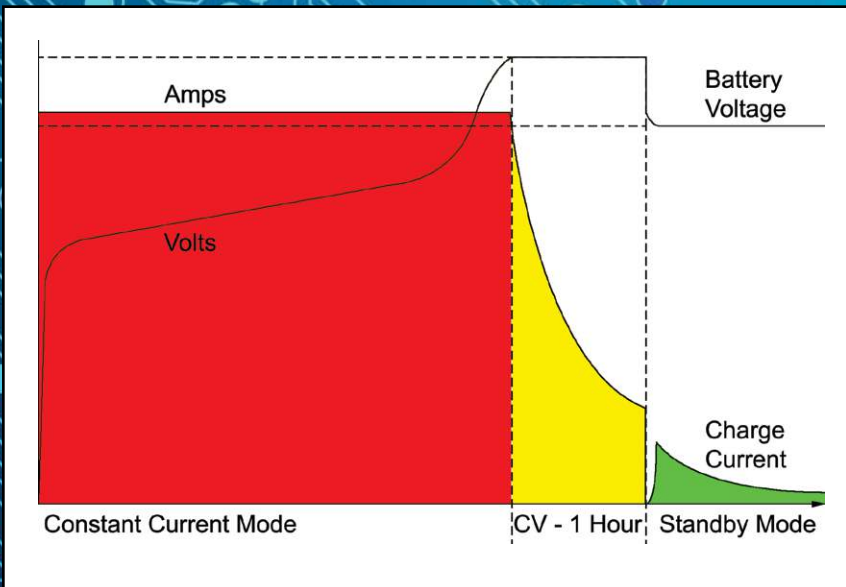

MODEL	INPUT VOLTAGE	OUTPUT (VOLTS / AMPS)	DIMENSIONS (L x W x H)	WEIGHT (Kg)	MINIMUM BATTERY SIZE
Beta E124	220/240V 50Hz	12V 4.0A	138 x 80 x 46mm	0.75	16Ah

Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC) and also the Low Voltage Directive (73/23/EEC). Compliance is achieved by working to BS EN 55014 section 7.3.7.7 and BS EN 60-335-2-29.