



**RITELITE**  
(SYSTEMS) LTD

## Alpha 122.7 Plug Top Charger



### FEATURES


- Switch mode
- Input voltage 220/240V 50Hz
- Output voltage 12V
- Output current 2.7A
- 3 stage charging
  - Constant current
  - Constant voltage
  - Float
- Timing control
- LED status indication
- Reverse polarity protection
- Compact plastic housing
- Short circuit protection
- Light weight
- Cost effective

### OPTIONS

- Output connector options
- Set for sealed lead acid
- European plug format

### APPLICATIONS

- Portable worklights
- Medical equipment
- Alarm systems
- Electrical standby

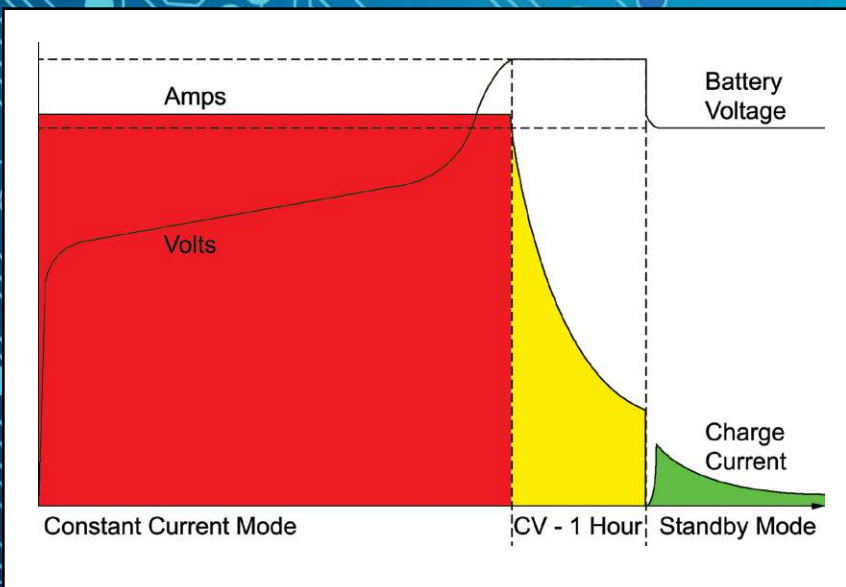

MODEL	INPUT VOLTAGE	OUTPUT (VOLTS / AMPS)	DIMENSIONS (L x W x H)	WEIGHT (Kg)	MINIMUM BATTERY SIZE
Alpha 122.7	220/240V 50Hz	12V 2.7A	100 x 63 x 56mm	0.27	10Ah

Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC) and also the Low Voltage Directive (73/23/EEC). Compliance is achieved by working to BS EN 55014 section 7.3.7.7 and BS EN 60-335-2-29.