



RITELITE
(SYSTEMS) LTD

Beta 51204 5-Way Charger



FEATURES


- Microprocessor controlled
- Start routine includes self test
- Input voltage 220/240V 50Hz
- Output voltage 12V
- Output current 4.0A
- 3 stage charging
 - Constant current
 - Constant voltage
 - Float
- Proportional timing, T/2 + 1hr
- 3 LED status indication
- Reverse polarity protection
- Rugged powder coated steel case
- Short circuit protection
- Independant overrun timer
- Soft start current control
- Zero parasitic current

OPTIONS

- Input voltage 110/130V
- Output connector options
- Set for sealed lead acid, option of others
- Temperature compensation

APPLICATIONS

- Portable worklights
- Medical equipment
- Toys
- Robotics

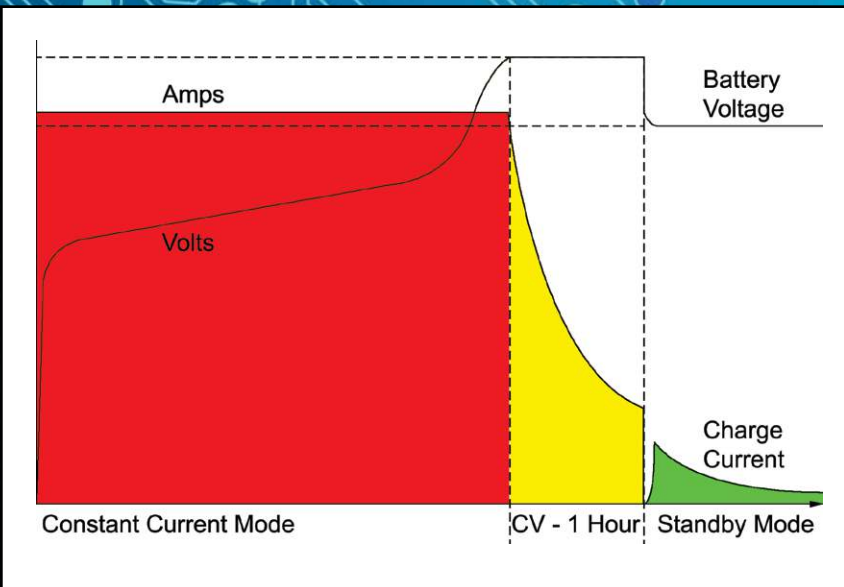

MODEL	INPUT VOLTAGE	OUTPUT (VOLTS / AMPS)	DIMENSIONS (L x W x H)	WEIGHT (Kg)	MINIMUM BATTERY SIZE
Beta 51204	220/240V 50Hz	12V 4.0A x 5	150 x 455 x 125mm	11	16Ah

Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC) and also the Low Voltage Directive (73/23/EEC). Compliance is achieved by working to BS EN 55014 section 7.3.7.7 and BS EN 60-335-2-29.