



**RITELITE**  
(SYSTEMS) LTD

## Vepac 1212-4 Vehicle Charger

### FEATURES


- Electronically controlled
- Input voltage 12 - 24V DC
- Output voltage 12V
- Output current 4.0A
- 3 stage charging
  - Constant current
  - Constant voltage
  - Float
- Proportional timing control
- LED status indication
- Reverse polarity protection
- Compact plastic housing
- Short circuit protection
- Light weight
- Auto start up and shut down

### OPTIONS

- Output connector options
- Set for sealed lead acid
- Reduced output current
- Input connector

### APPLICATIONS

- Portable worklights
- Golf trolley and buggies
- Leisure vehicles
- Mobility vehicles

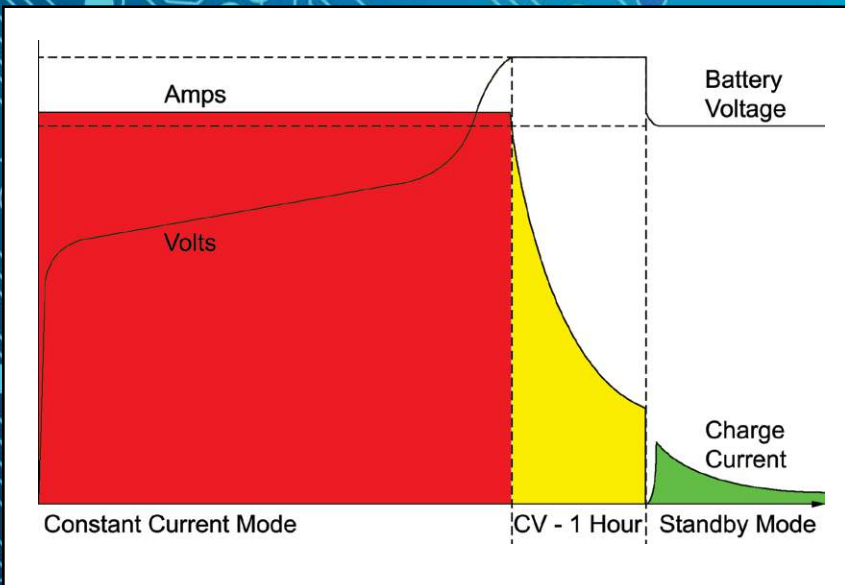

| MODEL        | INPUT VOLTAGE | OUTPUT (VOLTS / AMPS) | DIMENSIONS (L x W x H) | WEIGHT (Kg) | MINIMUM BATTERY SIZE |
|--------------|---------------|-----------------------|------------------------|-------------|----------------------|
| Vepac 1212-4 | 12V DC        | 12V 4.0A              | 143 x 82 x 39mm        | 0.5         | 16Ah                 |

Chargers are CE marked to indicate compliance with the Electromagnetic Compatibility Directive (89/336/EEC) and amending directive (92/31/EEC) and also the Low Voltage Directive (73/23/EEC). Compliance is achieved by working to BS EN 55014 section 7.3.7.7 and BS EN 60-335-2-29.